





Hex Female Pipe Cap__NPT(F)

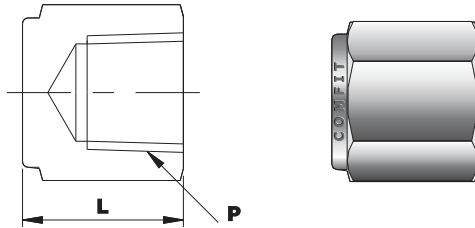


COMFIT PRODUCT CODE	NPT Female (P)	LENGTH (L)	HEX (F)	WORKING PRESSURE (PSIG) STAINLESS STEEL
	(Inch)			
1-CPHFPC	1/16	0.50	7/16	7500
2-CPHFPC	1/8	0.75	9/16	6400
4-CPHFPC	1/4	0.91	3/4	6600
6-CPHFPC	3/8	1.03	7/8	5300
8-CPHFPC	1/2	1.34	1-1/16	5200
12-CPHFPC	3/4	1.44	1-1/4	4300
16-CPHFPC	1	1.62	1-5/8	4500
20-CPHFPC	1-1/4	2.00		
24-CPHFPC	1-1/2	2.06		
32-CPHFPC	2	2.17		

Hex Male Plug__NPT(M)

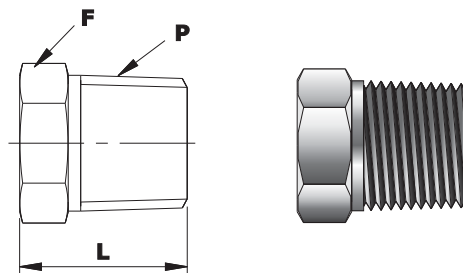

COMFIT PRODUCT CODE	NPT Male (P)	LENGTH (L)	HEX (F)	WORKING PRESSURE (PSIG) STAINLESS STEEL
	(Inch)			
1-CPHMP	1/16	0.75	3/8	10000
2-CPHMP	1/8	0.75	7/16	9100
4-CPHMP	1/4	0.96	9/16	7500
6-CPHMP	3/8	0.99	11/16	7200
8-CPHMP	1/2	1.21	7/8	6600
12-CPHMP	3/4	1.21	1-1/16	6400
16-CPHMP	1	1.50	1-5/16	4600
20-CPHMP	1-1/4	1.59	1-3/4	
24-CPHMP	1-1/2	1.74	2-1/8	
32-CPHMP	2	1.96	2-3/4	

Hex Male Plug-RS__ISOP(M)

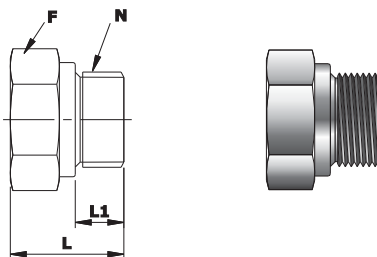

COMFIT PRODUCT CODE	ISO MALE (N)	LENGTH (L)	LENGTH (L1)	HEX (F)	WORKING PRESSURE (PSIG) STAINLESS STEEL
	(Inch)				
2RS-CPHMP	1/8	0.55	0.28	9/16	9100
4RS-CPHMP	1/4	0.78	0.44	3/4	7500
6RS-CPHMP	3/8	0.78	0.44	7/8	7200
8RS-CPHMP	1/2	0.99	0.56	1-1/16	6600
12RS-CPHMP	3/4	1.13	0.63	1-5/16	6400
16RS-CPHMP	1	1.21	0.72	1-5/8	4600

1) RS parallel threads are commonly used with flat RP gasket, please refer page no. 29