



MALE CONNECTOR-RS_MT X ISOP(M)

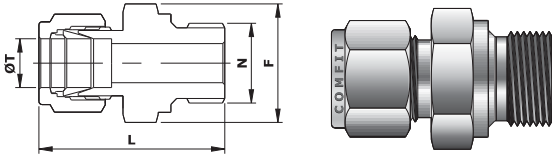

- 1) RS parallel threads are commonly used with flat RS gasket, please refer page no. 29
- 2) RP gasket can also be used for RS fittings.


COMFIT PRODUCT CODE	TUBE OD (ØT)	BSPP (ISO) Male Pipe Size(N)	LENGTH (L)	HEX (F)
	(mm)	(Inches)	(mm)	
3M-CMCD-2RS	3	1/8	30.3	14
3M-CMCD-4RS	3	1/4	35.3	19
4M-CMCD-2RS	4	1/8	30.7	14
6M-CMCD-2RS	6	1/8	32.3	14
6M-CMCD-4RS	6	1/4	37.6	19
6M-CMCD-6RS	6	3/8	38.9	22
6M-CMCD-8RS	6	1/2	44.7	27
8M-CMCD-2RS	8	1/8	33.2	16
8M-CMCD-4RS	8	1/4	38.5	19
8M-CMCD-6RS	8	3/8	39.8	22
8M-CMCD-8RS	8	1/2	45.6	27
10M-CMCD-4RS	10	1/4	39.4	19
10M-CMCD-6RS	10	3/8	40.6	22
10M-CMCD-8RS	10	1/2	46.5	27
12M-CMCD-4RS	12	1/4	42.6	22
12M-CMCD-6RS	12	3/8	43.1	22
12M-CMCD-8RS	12	1/2	49.0	27
12M-CMCD-12RS	12	3/4	52.8	35
15M-CMCD-8RS	15	1/2	49.0	27
16M-CMCD-6RS	16	3/8	43.9	25
16M-CMCD-8RS	16	1/2	49.0	27
22M-CMCD-16RS	22	1	55.3	41
25M-CMCD-12RS	25	3/4	57.5	35
25M-CMCD-16RS	25	1	60.1	41

BULKHEAD MALE CONNECTOR_FT X NPT(M)



COMFIT PRODUCT CODE	TUBE OD (ØT)	NPT Male Pipe Size (N)	LENGTH (L)	HEX (F)
	(Inches)			
2-CBMCD-2N	1/8	1/8	1.83	1/2
4-CBMCD-2N	1/4	1/8	1.95	5/8
4-CBMCD-4N	1/4	1/4	2.13	5/8
4-CBMCD-6N	1/4	3/8	2.16	11/16
4-CBMCD-8N	1/4	1/2	2.37	7/8
5-CBMCD-2N	5/16	1/8	2.08	11/16
5-CBMCD-4N	5/16	1/4	2.27	11/16
6-CBMCD-2N	3/8	1/8	2.08	3/4
6-CBMCD-4N	3/8	1/4	2.26	3/4
6-CBMCD-6N	3/8	3/8	2.48	3/4
6-CBMCD-8N	3/8	1/2	2.51	7/8
8-CBMCD-4N	1/2	1/4	2.49	1
8-CBMCD-6N	1/2	3/8	2.49	1
8-CBMCD-8N	1/2	1/2	2.71	1
8-CBMCD-12N	1/2	3/4	2.72	1-1/8
12-CBMCD-8N	3/4	1/2	3.00	1-3/16
12-CBMCD-12N	3/4	3/4	3.00	1-3/16
16-CBMCD-12N	1	3/4	3.54	1-5/8
16-CBMCD-16N	1	1	3.67	1-5/8

Bulkhead Male Connector__MT x NPT(M)

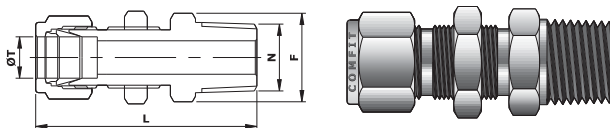

COMFIT PRODUCT CODE	TUBE OD (ØT)	NPT Male Pipe Size (N)	LENGTH (L)	HEX (F)
	(Inches)	(Inches)	(mm)	
6M-CBMCD-2N	6	1/8	49.6	16
6M-CBMCD-4N	6	1/4	53.6	16
8M-CBMCD-2N	8	1/8	52.3	19
8M-CBMCD-4N	8	1/4	57.5	19
10M-CBMCD-4N	10	1/4	58.4	22
10M-CBMCD-6N	10	3/8	58.4	22
10M-CBMCD-8N	10	1/2	63.1	22
12M-CBMCD-4N	12	1/4	63.3	25
12M-CBMCD-6N	12	3/8	64.5	25
12M-CBMCD-8N	12	1/2	68.8	25

DIMENSIONS FOR REFERENCE ONLY, SUBJECT TO CHANGE.